


ALFRA ROTABEST® – V 32

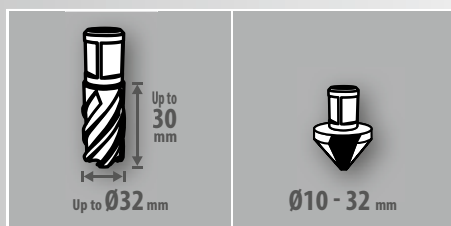

V 32

| | |
|--|----------------------------------|
| Core drill dimensions | Ø 12.0 - 32.0 mm |
| Cutting depth | 30.0 mm |
| Counterboring | Ø 10.0 - 32.0 mm |
| Arbors | 19 mm Weldon shank |
| 1-speed gearbox | 450 rpm |
| Stroke | 45 mm |
| Power consumption | 900 W |
| Voltage | 230 V 50/60 Hz 110 V 50/60 Hz |
| Tool force (10 mm)/ magnetic adhesion strength | 2,100 N / 16,000 N |
| Magnetic base | 95 x 200 mm |
| Weight | 12.5 kg |

| | |
|--|---|
| Motor | |
| Compact, lying | |
| Gearboxes | |
| Compact mitre gear | |
| Slide | |
| 2-sided column guide | |
| Operation | |
| Space-saving - through ratchet | |
| Magnet | |
| Metal rings | ✓ |
| Performance and weight optimisation | ✓ |
| Made in Germany | ✓ |

| | |
|---|--|
| Scope of delivery | |
| <ul style="list-style-type: none"> • Metal core drilling machine V 32 • Coolant pressure bottle • Carrying case • Allen key for Weldon arbor • Seat belt • Ejector pin 6.35 x 74 mm (specially for Rotabest® V32) • Operating instructions • incl. 1 core drill free | |



Prod.-No.

| | | |
|---------------------|----------|-----------|
| ALFRA Rotabest® V32 | 230 Volt | 18710 |
| ALFRA Rotabest® V32 | 110 Volt | 18710.110 |