ECO.200







See icon guide on cover flap









200_{mm}

205mm










3600 W

180_{mm}

This beastly machine is engineered with the focus on high demand drilling tasks while remaining portability. The ultimate combination of 3600W motor unit, 3900kg magnet and MT4 Spindle makes sure it will help you drill holes up to 200mm diameter with unimaginable precision and ease. This exceptional machine is the solution for any challenging job on site.

This machine is ideal for: Large diameter drilling tasks



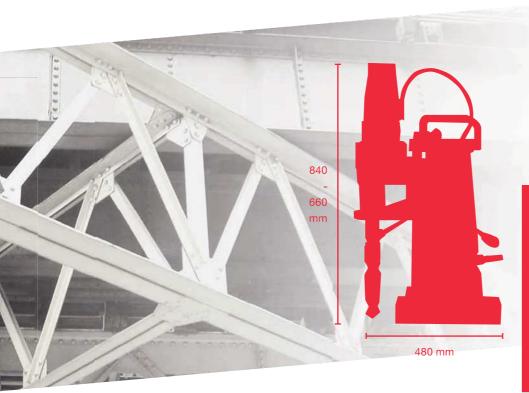













Features

- Integrated safety strap and lifting shackle
- Easy controls
- Sturdy fixings
- Morse Taper 4 spindle

Technical data

Twist drills Ø up to 44 mm Countersinking Ø up to 205 mm Length 480 mm Width 260 mm Height 660 - 840 mm Stroke 180 mm Weight 53 kg Magnet (I x w) 330 x 110 mm x 63 Magnetic force 3900 kg Motor power 3600 W Total power 3800 W Speed (no load) (I) 410 min ⁻¹ (II) 170 min ⁻¹ (II) 70 min ⁻¹ Spindle (Weldon) MT4 1 1/4" (31,75 mm)	Annular cutters	Ø 12 - 200 mm
Length 480 mm Width 260 mm Height 660 - 840 mm Stroke 180 mm Weight 53 kg Magnet (I x w) 330 x 110 mm x 63 Magnetic force 3900 kg Motor power 3600 W Total power 3800 W Speed (no load) (I) 410 min ⁻¹ (II) 170 min ⁻¹ (II) 170 min ⁻¹ (II) 70 min ⁻¹ Speed (load 3600W) (II) 150 min ⁻¹ (II) 70 min ⁻¹ (II) 70 min ⁻¹ Spindle (Weldon) MT4 1 1/4" (31,75 mm)	Twist drills	Ø up to 44 mm
Width 260 mm Height 660 - 840 mm Stroke 180 mm Weight 53 kg Magnet (I x w) 330 x 110 mm x 63 Magnetic force 3900 kg Motor power 3600 W Total power 3800 W Speed (no load) (I) 410 min ⁻¹ (II) 170 min ⁻¹ (II) 170 min ⁻¹ (II) 70 min ⁻¹ (II) 70 min ⁻¹ (III) 70 min ⁻¹ (IIII) 70 min ⁻¹	Countersinking	Ø up to 205 mm
Height 660 - 840 mm Stroke 180 mm Weight 53 kg Magnet (I x w) 330 x 110 mm x 63 Magnetic force 3900 kg Motor power 3600 W Total power 3800 W Speed (no load) (I) 410 min ⁻¹ (II) 170 min ⁻¹ (II) 70 min ⁻¹ (III) 70 min ⁻¹ (III) 70 min ⁻¹	Length	480 mm
Stroke 180 mm Weight 53 kg Magnet (I x w) 330 x 110 mm x 63 Magnetic force 3900 kg Motor power 3600 W Total power 3800 W Speed (no load) (I) 410 min ⁻¹ (II) 170 min ⁻¹ Speed (load 3600W) (I) 150 min ⁻¹ (II) 70 min ⁻¹ Spindle (Weldon) MT4 1 1/4" (31,75 mm)	Width	260 mm
Weight 53 kg Magnet (I x w) 330 x 110 mm x 63 Magnetic force 3900 kg Motor power 3600 W Total power 3800 W Speed (no load) (I) 410 min ⁻¹ (II) 170 min ⁻¹ (II) 170 min ⁻¹ (II) 70 min ⁻¹ (II) 70 min ⁻¹ (II) 70 min ⁻¹ (III) 70 min ⁻¹ (IIII) 70 min ⁻¹ (IIIII) 70 min ⁻¹ (IIIIIIIII) 70 min ⁻¹ (IIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIIII	Height	660 - 840 mm
Magnet (I x w) 330 x 110 mm x 63 Magnetic force 3900 kg Motor power 3600 W Total power 3800 W Speed (no load) (I) 410 min ⁻¹ (II) 170 min ⁻¹ (II) 150 min ⁻¹ (II) 70 min ⁻¹ (II) 70 min ⁻¹ Spindle (Weldon) MT4 1 1/4" (31,75 mm)	Stroke	180 mm
Magnetic force 3900 kg Motor power 3600 W Total power 3800 W Speed (no load) (I) 410 min ⁻¹ (II) 170 min ⁻¹ Speed (load 3600W) (I) 150 min ⁻¹ (II) 70 min ⁻¹ Spindle (Weldon) MT4 1 1/4" (31,75 mm)	Weight	53 kg
Motor power 3600 W Total power 3800 W Speed (no load) (I) 410 min ⁻¹ (II) 170 min ⁻¹ (I) 150 min ⁻¹ (II) 70 min ⁻¹ (II) 70 min ⁻¹ Spindle (Weldon) MT4 1 1/4" (31,75 mm)	Magnet (I x w)	330 x 110 mm x 63
Total power 3800 W Speed (no load) (I) 410 min ⁻¹ (II) 170 min ⁻¹ Speed (load 3600W) (I) 150 min ⁻¹ (II) 70 min ⁻¹ (II) 70 min ⁻¹ Spindle (Weldon) MT4 1 1/4" (31,75 mm)	Magnetic force	3900 kg
Speed (no load) (I) 410 min ⁻¹ (II) 170 min ⁻¹ Speed (load 3600W) (I) 150 min ⁻¹ (II) 70 min ⁻¹ Spindle (Weldon) MT4 1 1/4" (31,75 mm)	Motor power	3600 W
Speed (no load) (II) 170 min ⁻¹ Speed (load 3600W) (I) 150 min ⁻¹ (II) 70 min ⁻¹ (II) 70 min ⁻¹ Spindle (Weldon) MT4 1 1/4" (31,75 mm)	Total power	3800 W
(II) 170 min ⁻¹ (I) 150 min ⁻¹ (II) 70 min ⁻¹ (II) 70 min ⁻¹ (III) 71 min ⁻¹ (III) 70 min ⁻¹	Speed (no load)	(I) 410 min ⁻¹
Speed (load 3600W) (II) 70 min ⁻¹ Spindle (Weldon) MT4 1 1/4" (31,75 mm)	opeed (no load)	(II) 170 min ⁻¹
(II) 70 min ⁻¹ Spindle (Weldon) MT4 1 1/4" (31,75 mm)	Speed (load 3600W)	(I) 150 min ⁻¹
		(II) 70 min ⁻¹
Valtage 110/000 V 50/00 U=	Spindle (Weldon)	MT4 1 1/4" (31,75 mm)
Voltage 110/220 V - 50/60 Hz	Voltage	110/220 V - 50/60 Hz

- 1 Integrated tool cooling fluid tank
- 2 High precision tubular rail balancer system, progressive feed assist
- 3 Extremely strong 2-speed gearing
- 4 Fold away carrying handles & lifting shackle
- 5 Super long stroke especially suitable for long cutters and twist drills
- 6 Cooling fluid level indication
- 7 Safety strap
- 8 MT4 spindle